

# TOWMASTER®

## Drop-Deck Tilt T-5DT



Positive locking (over-center) latch system keeps deck secured to the frame.



Grommet mounted LED lights are standard.



The "SL" (Scissor Lift) option includes ramps to lower the loading incline.

### Description:

The T-5DT is a pan type tilt-deck trailer designed for hauling small equipment. The deck features white oak wood and 7-inch high sides. The low deck height offers a shallow tilt angle that allows small equipment to easily climb the incline. For scissor lifts, an "SL" option adds ramps for an even lower load angle. The T-5DT features a rubber-ride axle for a smooth ride, electric brakes, an adjustable hitch, and a positive locking (over-center) latch system to safely keep the deck secured to the frame.

### Quick Specs:

- 2" nominal white oak deck
- 16.5" deck height (empty)
- 77" between fenders
- 12' and 14' deck lengths
- Electric brakes
- Dexter® Torflex® axle
- E-Z Lube hubs
- LED Lights and Sealed Wiring

[towmaster.com](http://towmaster.com)

**800-462-4517**


**U.S.A. BUILT  
EMPLOYEE OWNED  
AMERICA'S BEST TRAILER**



**GALVANIZING  
AVAILABLE**



Photos may show optional equipment.

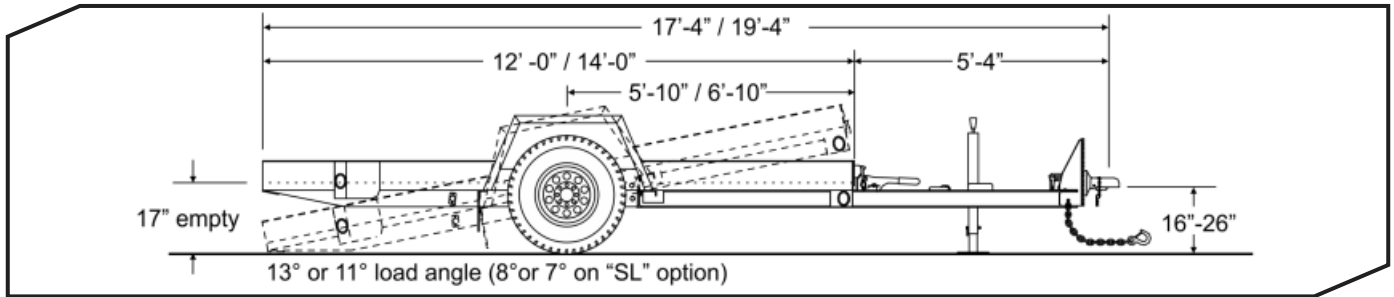

### SPECIFICATIONS

S=Standard O=Optional

T-5DT

#### CAPACITY / DIMENSIONS

Payload Rating (lbs/kg)	6,000 / 2722			
GVWR (lbs/kg)	8,000 / 3629			
GAWR (lbs/kg)	7,000 / 3175			
Approx. Avg. Weight (lbs/kg)	2,000 / 907			
Overall Length (12'-0") (ft-in/mm)	17-4 / 5283			
Overall Length (14'-0") (ft-in/mm)	19-4 / 5893			
Deck Height (empty)(in/mm)	16.5 / 419			
Overall Width (ft-in/mm)	8-6 / 2591			
Load Width (in/mm)	77 / 1956			

#### TONGUE

Tongue Length (ft-in/mm)	5'-4" / 1626			
Pintle Ring (in)	2.5			
Safety Chain	3/8" Grade 43			
Bolt-on Drop-Leg Parking Jack	7K			

#### FRAME / RAMPS

Main Beam	M4 x 13 beam			
Crossmembers	3" Jr I-beam			
Headboard Height (in / mm)	7 / 177			
Deck	Oak Wood			
Deck Lip (in / mm)	7 / 177			
Deck Latch	Single Point			
12 ga. One-piece formed fenders and inner panel	S			
Load Angle (degrees) – depending on deck length	9, 11			
Tie Downs	D-ring			
Number of Tie-Downs (Total / Side)	6 / 3			

#### SUSPENSION / TIRES

Rubber-Ride Axles w/Warranty	S			
Axle Capacity (each) (lbs/kg)	7,000 / 3175			
Axle Spread (in/mm)	N/A			
Hubs	E-Z Lube			
Electric Brakes w/Forward Adjust	S			
Brake Size (in/mm)	12x2 / 305x51			
Battery Break-Away Kit with Tow Charger	S			
Wheels (in/mm)	16x6 / 406x152			
Wheel Bolt Pattern	8-bolt			
Tires / Load Range Rating	235/85R16 / E			

#### STANDARD EQUIPMENT

- Adjustable hitch height
- Weather resistant sealed modular wiring
- Grommet mounted LED lights
- Registration holder
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- D.O.T. approved conspicuity tape
- Mud flaps
- RV electrical plug
- Trailer color: Equipment black

#### OPTIONAL EQUIPMENT

Other options may be available. Ask your dealer or visit our web site.

- Hydraulic surge brakes
- 3" pintle ring or 2-5/16" ball coupler
- Steel deck
- Deck cushion cylinder
- 6-pole round electrical plug
- Additional tie-downs
- Spare tire and wheel
- Tire upgrade, 235/85R16, 10-ply, load range E tires
- "SL" ramp option for hauling scissor lifts
- Color options: Construction Yellow, Equipment Red, Blue, Charcoal
- Galvanizing

#### U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

\*Payload capacity is calculated by taking the GVWR and subtracting the trailer weight.

Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.